

4-Wire Cable Tester

8761 NAC

Feature

- 4-wire measurement conductance $1m\Omega$ - 52Ω
- Test pin 64/128
- Number of test file up to 500 sets
- Using fixture FX-000C21/FX000C22
- Automatically identify the normal or reverse plugin of wire or connectors
- The measurement items: Open/Short, Conductance, Components, AC Hipot, DC insulation/Hipot, Quick conductance, Intermittence O/S, and Quick Intermittence open circuit.
- Multiple DUT test-4 (standard)/ expand 14 (option)
- USB Host storages setting files and can update firmware
- Support bar code scan and print function
- External current expand box for wire buck measurement

Application

All kinds of wires, connectors and combined products of connectors and wires



CE RS-232 Remote USB Host Print

Accessories / Fixtures

Standard


- Power Cord
- User Manual (CD)
- FX-000C22
- AK-8600F2

Optional

- PC link software
- Remote control cable
- KB-8750K1
- F874003
- F874001
- FX-000C15
- FX-000C16
- FX-000C18
- FX-000C17
- Network Fixture
- D-Sub foot switch (F760001)
- Printer


Key Features

A USB 3.0-3.1 Interfaces



8761NAC 4-wire measurement Type-c has two type of fixtures, Type-A (FX-000C21) and Type-c (FX000C22)


B Current Expand Box F874003

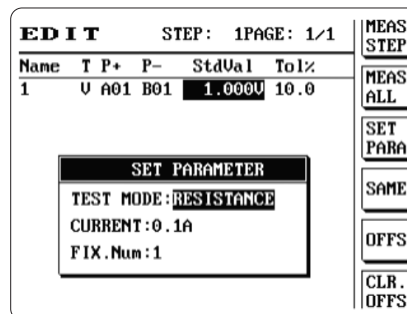


F874003 Current Expand Box

Current Expand Box F874003 (5A) can measure voltage difference and inner resistance.

C E-mark IC of USB Type-c

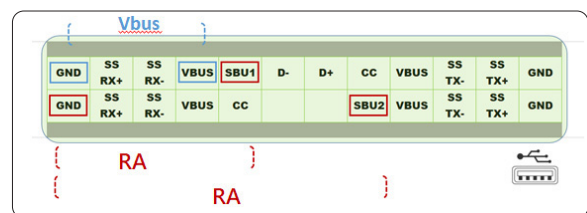

NET CONSTEP: 4 PAGE 3/3						COPY
Name	T	P+	P-	StdVal	Tol%	DEL.
COND	T	A04	B22	3.000R	<= STD	
RA	R	A10	A01	1.000K	20.0	
RA	R	B15	A01	1.000K	20.0	
VBUS	C	A07	A01	40.000n	20.0	
CC	C	A15	A01	800.000n	20.0	
CC	C	B10	B01	800.000n	20.0	
D	D	A10	A07	3.900U	>= STD	
D	D	A07	A10	0.800U	<= STD	
D	D	B15	B07	3.900U	>= STD	
D	D	B07	B15	0.800U	<= STD	



NAC model can measure short circuit and on-resistance, also can measure Emark IC, the resistance $1K\Omega$ - R_a , the forward and reverse bias of the diode, the bypass of the TxRx signal line to Gnd, and other calibration capacitors (this equivalent capacitance will vary depending on the length of the line) and the Vbus filter capacitor to Gnd.

Specification

Model Name	8761NAC		
Measuring Mode	4-wire		
Test Pin	64/128		
AC Output Voltage	100-700V		
DC Output Voltage	50-1000V		
Hipot Output Accuracy	±5%		
Hipot Measurement Accuracy	±5%		
Rated Output	5Vdc		
Hipot Measurement Time	0.01s-60s		
Wire Specifications	Maximum allowable capacitance 5 μ F		
Measurement Items and Measurement Range	Conductance	1m Ω -52 Ω	
	Intermittence Conductance	1m Ω -52 Ω	
	AC Hipot Leakage Current	0.01mA-5mA	
	DC Hipot Leakage Current	0.1 μ A-1000 μ A	
	DC Hipot Insulation Resistance	1M Ω -1.2G Ω	
	O/S, Intermittence O/S, Quick Intermittence open circuit	1k Ω -100k Ω	
	Resistance	Measurement Range	50m Ω -20M Ω
		Level Signal	0.5-3V
		Current Signal	10mA
	Capacitance	Measurement Range	10pF-3 μ F
		Frequency Signal	AUTO Gear (Optional) 48Hz/480Hz/4.8kHz/48kHz
		Level Signal	0.3V-1.2V
	Diode	0-6.8V	
	Single-Side Test	Able to do the Single-Side Test	
O/S Determinal Judge	With this feature		
Advanced Functions	Programmable continuous test/Pin search/Auto-diagnosis		
Test Scan Mode	Auto, Manual, External Trigger		
Measurement Signal	Low Voltage Measurement Signal		
Built-in Storage	Number of test file up to 500 sets		
OS Positive and Negative Judgment Method	Learning netlist by four groups		
OS Voltage	Adjustment range 0.1V-4V		
OS Netlist Test Mode	Pattern/point-by-point scanning		
Panel	System/Rapid /Edit/Function		
Indicator	Pass/Fail HV LED red-green indicator lights/Screen Display/Sound		

General

Power Supply	Fixed Voltage 115/230 Vac \pm 10%
	Frequency 60/50Hz
Interface	RS-232, USB Host, Print, Remote
Operation	Manual, Auto, Remote Control
Display	320*240 dot-matrix display
Environment	Temperature: 0 $^{\circ}$ C-40 $^{\circ}$ C, Humidity: RH \leq 75%
Dimension (W*H*D)	8761 (64): 435x145x406mm 8761 (128): 435x145x406mm 8761 (256): 435x190x406mm
Weight	8761 (64): 8.44kg 8761 (128): 9.3kg 8761 (256): 14kg